

2,2 Nm $\pm$ 0,2 / 19.5 lb-in $\pm$ 1.8




Maxi 0,8 Nm / 7.5 lb-in


⚠ ⚠ DANGER

HAZARD OF ARC FLASH OR ELECTRIC SHOCK


- Hole diameter and tightening torques must comply with the specifications provided in this document.
- The accessory ZB5AZ905 must be used to tighten the nut.
- Do not remove the cap with voltage present.

Failure to follow these instructions will result in death or serious injury.


			
mm inch			
mm ² AWG	0,22...2,5 24....14	0,22...1 24....17	0,5...1,5 20...16 (2 wires max)




Intermittent XB5KS●




Continuous XB5KS●



XB5EV●



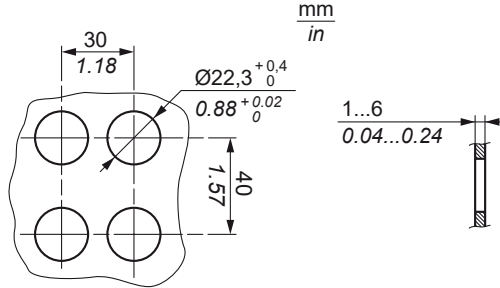

For use on flat surface of a type 4, type 4X, type 12 and type 13 enclosure.

en Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.